

GAS STOVES



www.regency-fire.com



GAS STOVES



RC500E shown in black cast with volcanic stones and rear venting (unit shown without mandatory safety screen).

GAS STOVE | Contura™ RC500E

3-SIDED GAS STOVE

With clean lines, three-sided viewing and a large door, the RC500E gives a light and modern impression to any home. There is no bad spot to site while warming up in front of this unit. Available in black or white, you can customize this modern gas stove with a traditional log set or volcanic stones on a bed of shimmering crystals. The curved design invites you to enjoy a stunning flame view from three sides. The peek-a-boo side windows offer a glimpse inside to warm your home and your heart.

SPECIFICATIONS	NATURAL GAS	PROPANE
Maximum BTU	23,000	22,000
Turn down to (BTU)	16,000	18,000
Efficiency (steady state)	67.13%	66.85%
EnerGuide rating (Canada only)	60.38%	61.42%



RC500E shown in white cast with glass door & top with traditional logs and top venting (unit shown without mandatory safety screen).

STANDARD FEATURES

- View the stunning flame from three sides
- Interior lights for added ambiance when the fire is off
- Variable speed blower
- Natural gas or propane
- Safety screen
- Electronic ignition
- Modulating flame adjustment
- Battery back up system keeps the heat on in the event of a power outage
- ProFlame II remote control
- Direct vent
- Reversible flue for top or rear venting

OPTIONS

- Available in black cast or white with glass door & top
- Your choice of crystals, volcanic stones or traditional logs
- Propane conversion kit



RC500E shown with safety screen



U39E shown with wrap around brushed nickel door, brushed nickel louvers and traditional log set (unit shown without mandatory safety screen).

GAS STOVES | Ultimate U38E (B-Vent) · Ultimate U39E (Direct Vent)

ULTIMATE GAS STOVES - U38E & U39E

The clean lines of these Ultimate Gas stoves wrap around an extraordinary fire. Your Ultimate fire can be turned up to the maximum heat setting to provide high efficiency or turned down to maintain ambience with less heat. Replace your old woodstove, install into your existing masonry fireplace, or warm up your kitchen, bedroom or den as you lower heating bills.

SPECIFICATIONS (NG)*	U38E B-VENT	U39E DIRECT VENT
Maximum BTU	38,000	33,500
Turn down to (BTU)	26,000	23,500
Efficiency (steady state)	71.61%	77.00%
EnerGuide rating (Canada only)	63.95%	71.82%

SPECIFICATIONS (PROPANE)*	U38E B-VENT	U39E DIRECT VENT
Maximum BTU	34,000	32,500
Turn down to (BTU)	27,500	26,000
Efficiency (steady state)	71.73%	77.79%
EnerGuide rating (Canada only)	64.66%	73.10%

*(-10) model specs on page 08



U38E shown with wrap around black door, black louvers and driftwood log set (unit shown without mandatory safety screen).

STANDARD FEATURES

- Natural gas
- Safety screen
- Flame height adjustment
- Electronic Ignition
- Proflame II Remote Control
- B-vent (U38E)
- Direct Vent (U39E)
- Black steel pedestal
- Pedestal side panels
- Variable speed blower
- 1-piece wrap around door in brushed nickel or black
- Battery back up system keeps the heat on in the event of a power outage

OPTIONS

- Choose between traditional or driftwood log set
- Brushed nickel or black louvers
- Wall thermostat
- BTU reduction kit
- Propane conversion kit
- AstroCap™ Venting System (U39E)
- Vertical or horizontal direct vent terminations (U39E)



U38E shown with safety screen



C34E shown with black legs, black door and safety screen.

GAS STOVE | Classic C34E

The Regency classic gas stove mirrors the authentic styling of a woodstove with all the convenience of gas. No chimney? No problem. With the direct vent option, you can vent up and out of your home saving installation dollars. Certified as heating appliances, all Regency gas stoves provide consistent, controllable heat, even during power outages.

SPECIFICATIONS*	NATURAL GAS	PROPANE
Maximum BTU	32,000	29,000
Turn down to (BTU)	21,000	23,000
Efficiency (steady state)	72.02%	72.02%
EnerGuide rating (Canada only)	64.97%	65.72%

*(-10) model specs on page 08

STANDARD FEATURES

- Natural gas or propane
- Beautiful fire with glowing logs
- Safety screen
- Flame height adjustment
- Proflame II Remote Control
- Direct Vent
- Convector airmate
- Heavy-duty ceramic safety glass
- Electronic Ignition
- Battery back up system keeps the heat on in the event of a power outage


OPTIONS

- Wall thermostat
- Variable speed blower
- Black steel pedestal base
- Cast iron door in black** or nickel accent
- Cast iron legs in brushed nickel or black
- Bottom heat shield (when using legs)
- AstroCap™ Venting System
- Vertical or horizontal direct vent terminations


** Black doors come with nickel handles & nickel hinge caps

SPECIFICATIONS

DIMENSIONS

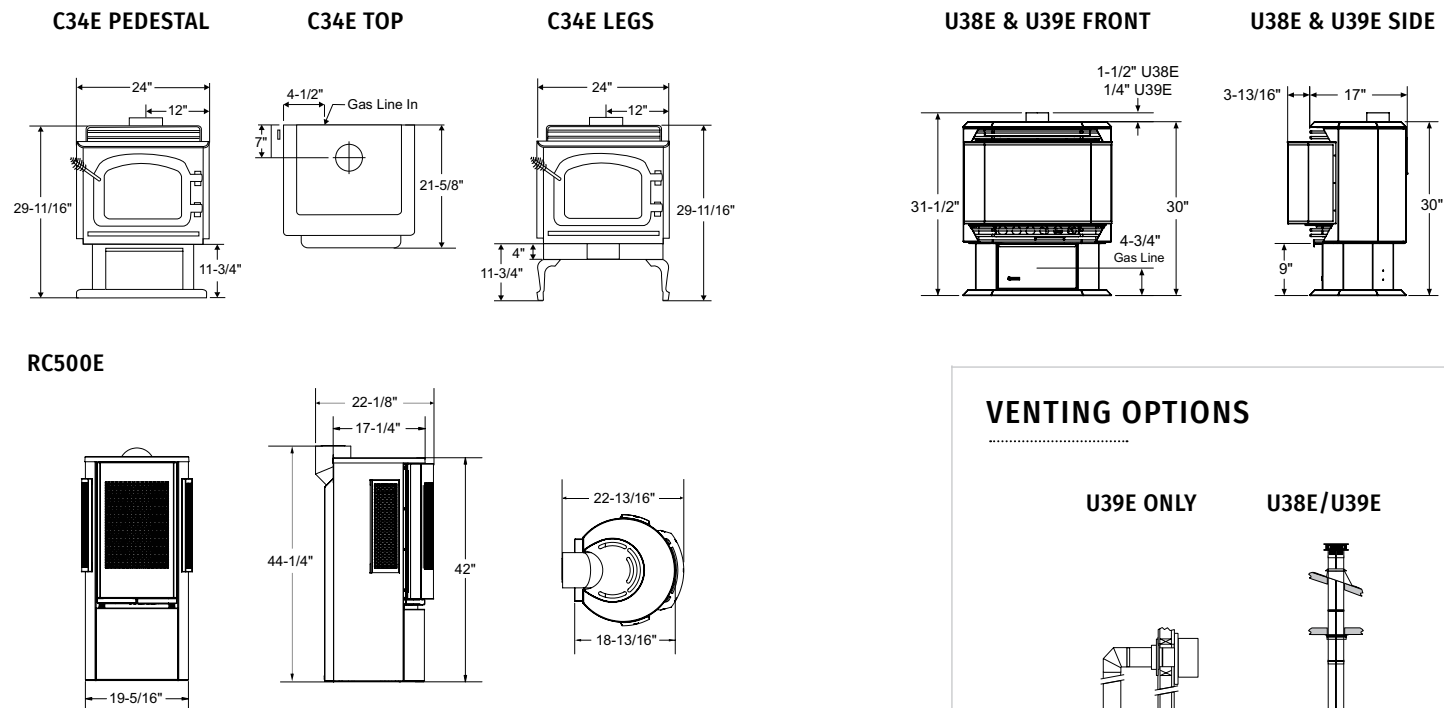


VENTING OPTIONS

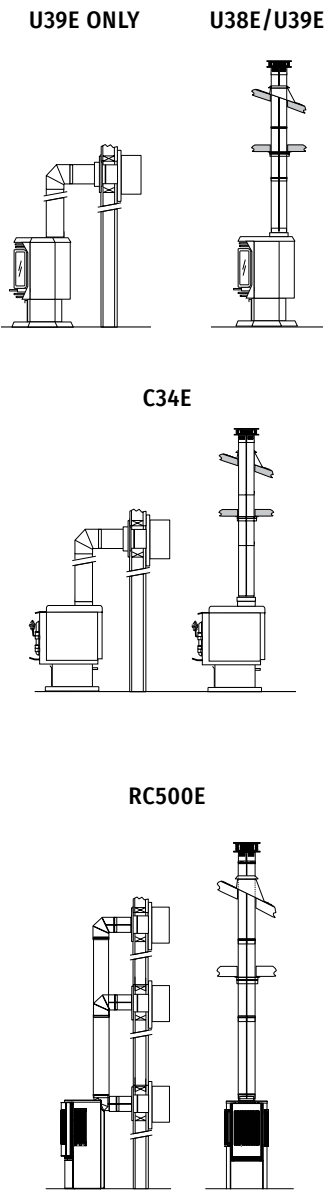

CLEARANCES


CLEARANCES TO COMBUSTIBLES - U38E, U39E, C34E



UNITS	A - SIDE WALL TO UNIT	B - BACK WALL TO UNIT	C (CORNER) - SIDE WALL TO UNIT
U38E B-vent	7-1/2"	6"	2"
U39E DV Top	7-1/2"	6"	2"
C34E DV	10"	6"	1-1/2"

B* - Rear wall clearance is a temperature issue and necessary for drafting purposes. Do not reduce clearance under any circumstances.

CLEARANCES - RC500E

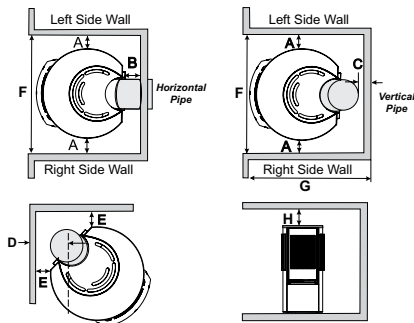

CLEARANCES		
A	Left/Right Side Wall to Unit	9"
B	Back Wall to Unit	2"
C	Vertical Vent Pipe to Back Wall	2"
D	Wall to Centerline of Pipe	8-3/4"
E	Unit Corner to Wall (Top Vent)	4"
F	Unit Corner to Wall (Rear Vent)	5-3/4"
G	Alcove Depth	36"
H	Minimum Ceiling from Top of Unit	15"

SPECIFICATIONS - STANDING PILOT (-10) MODELS*

*Discontinued products - Only available while quantities last.

NOTE: These units come with **proflame I remote control**.

SPECIFICATIONS (NG)	U38-NG10	U39-NG10	C34-NG10
Maximum BTU	40,000	38,000	32,000
Turn down to (BTU)	21,000	20,000	16,000
Efficiency (steady state)	67.17%	76.56%	70.42%
EnerGuide rating (Canada only)	58.37%	71.76%	62.39%

SPECIFICATIONS (PROPANE)	U38-LG10	U39-LG10	C34-LG10
Maximum BTU	38,000	38,000	32,000
Turn down to (BTU)	20,000	20,000	16,000
Efficiency (steady state)	67.89%	76.56%	70.42%
EnerGuide rating (Canada only)	60.03%	71.76%	62.39%

DIRECT VENT TECHNOLOGY



Direct vent technology means that you can install a Regency stove almost anywhere in your home - no chimney is needed. From the top of the unit, simply vent your stove through an exterior wall. Direct vent means that you have sealed combustion - outside air is brought in through the vent for combustion and the used air is sent back out to maintain indoor air quality.

COMFORT CONTROLS




Turn your fire on and off with a Proflame II remote control. The Proflame II can be used as a thermostat, allowing you to set and automatically maintain a desired temperature.



A Regency wall thermostat is a hands free solution that helps you maintain a constant temperature in your home. Choose the programmable wall thermostat and set different temperatures throughout the day to match your lifestyle. Wake up to warmth!

ENJOY YOUR REGENCY — FOR LIFE

You'll be happy with your Regency for years to come, our Limited Lifetime Warranty guarantees it. Not only have we invested in quality workmanship, the finest materials and durable heavy-duty construction but we have carefully selected a dealer network that is committed to your satisfaction. We know that you will be as proud of your Regency as we are.

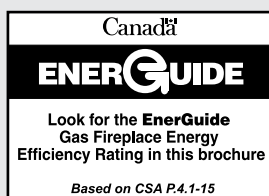

Look for the **EnerGuide**
Gas Fireplace Energy
Efficiency Rating in this brochure

Based on CSA P.4.1-15

your Regency dealer

www.regency-fire.com

©2019 FPI Fireplace Products International Ltd. Regency® and AstroCap® are the registered and/or proprietary trademarks of FPI Fireplace Products International Ltd. Printed in Canada (01/19)
Part no. 944-220